
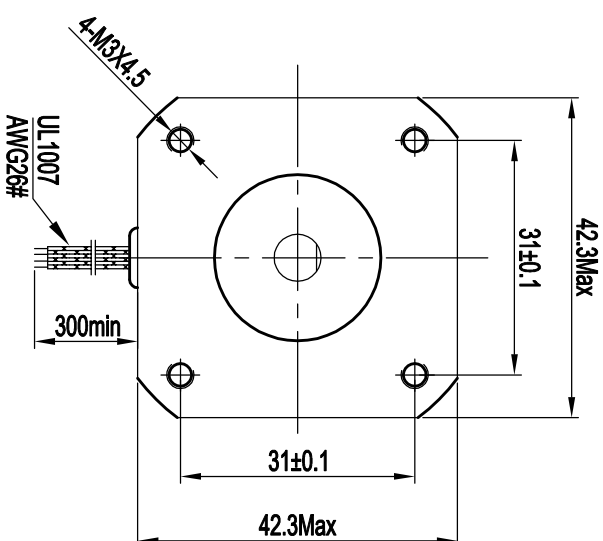
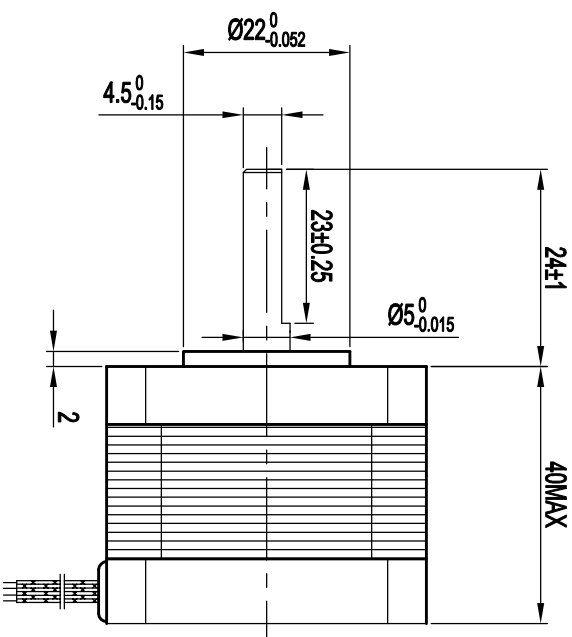


Exciting Sequence. VS. Direction of Rotation

STEP	1	2	3	4
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

Exciting sequence as the table specified will produce clockwise rotation when viewed from mounting end.

Case by two phase on



(COMMON RATINGS & SPECIFICATIONS)

Number of Phase:	2
Step angle:	1.8°
Rated Voltage:	3.7V
Rated Current/Phase:	1.7A
Resistance/Phase:	2.2 Ω ± 10% (20°C)

Inductance/Phase:	3.8mH ± 20%
Insulation Resistance:	100MΩ Min (500VDC)
Dielectric Strength:	500VAC 1 minute
Direction of Rotation:	(CW)
Holding Torque:	0.35N.M
Insulation Class:	B
Motor Weight:	0.3Kg

Unit: mm	
	FIRST ANGLE METHOD 

[illegible][illegible]

NEMA 17-40-001	
Specification	
www.winman.com.tr	