



Exciting Sequence. VS. Direction of Rotation

Diagram illustrating the sequence of steps (A, B, C, D) for a process, with arrows indicating the direction of flow (CW and CCW).

STEP	A	B	C	D
A	+	+	-	-
B	-	+	+	-
C	-	-	+	+
D	+	-	-	+

Exciting sequence as the table specified will produce clockwise rotation when viewed from mounting end.

Case by two phase on

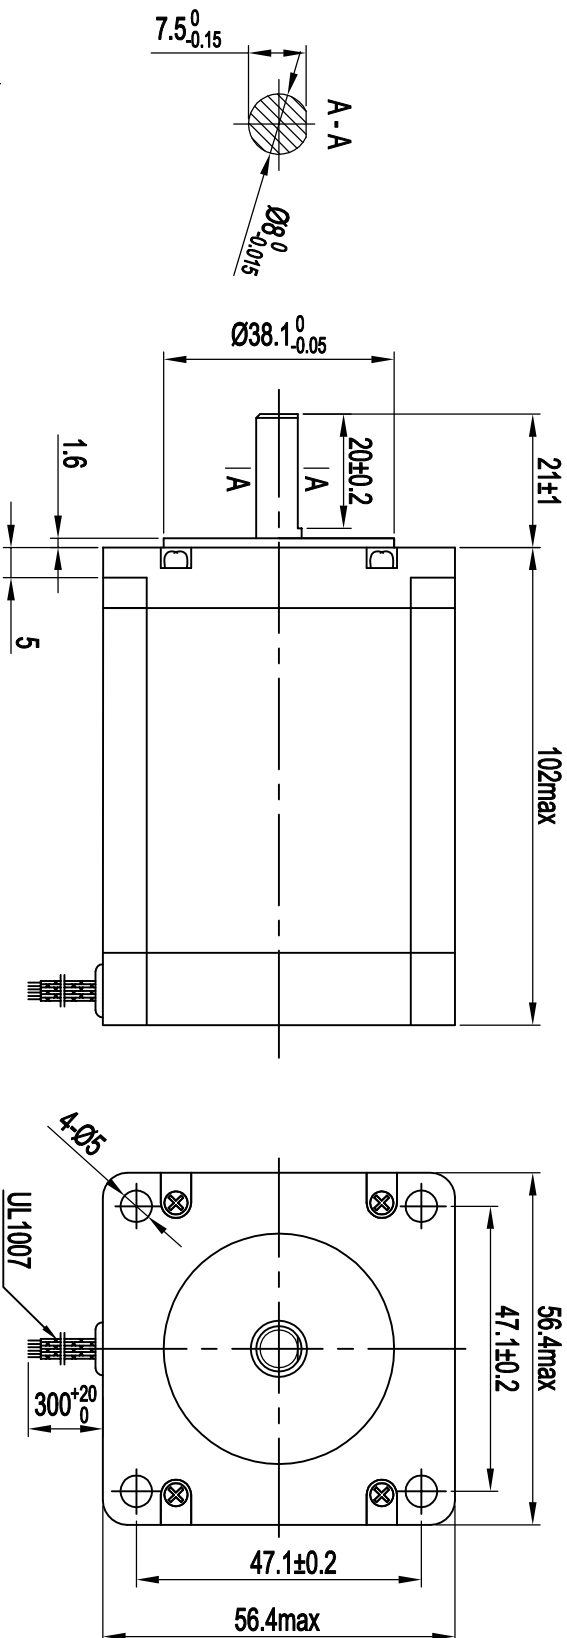

(COMMON RATINGS & SPECIFICATIONS)

Number of Phase:	2
Step angle:	1.8°
Rated Voltage:	2.7V
Rated Current/Phase:	4.2A
Resistance/Phase:	0.75 Ω $\pm$ 10% (20°C)

[illegible]