



200 Series Control Valve

Dimension(mm):


4V210-06

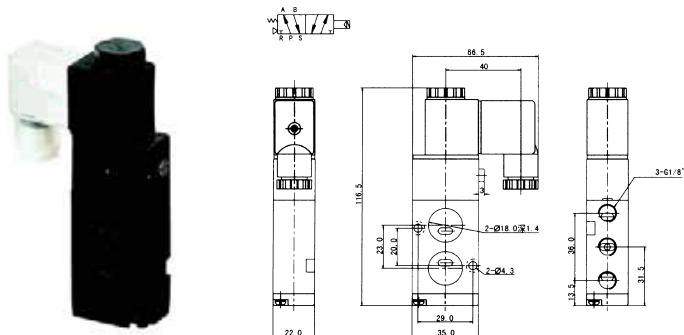


4V210-08

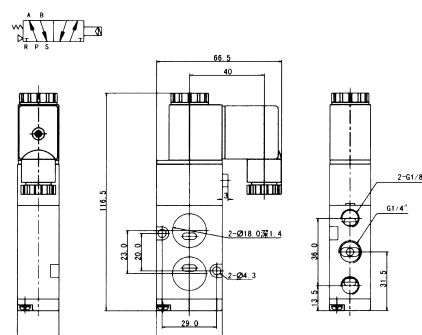


4V220-06

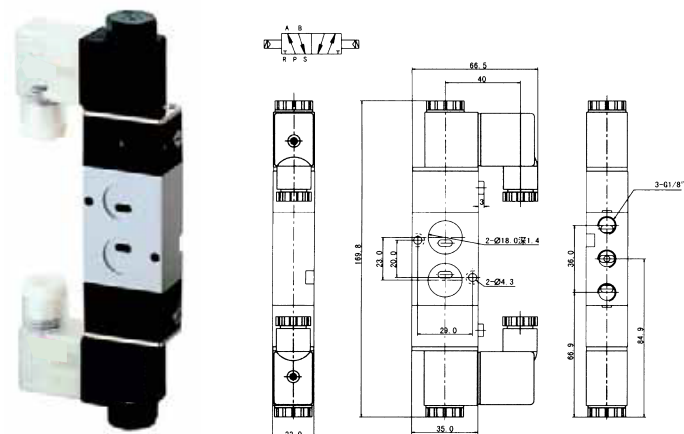


4V220-08

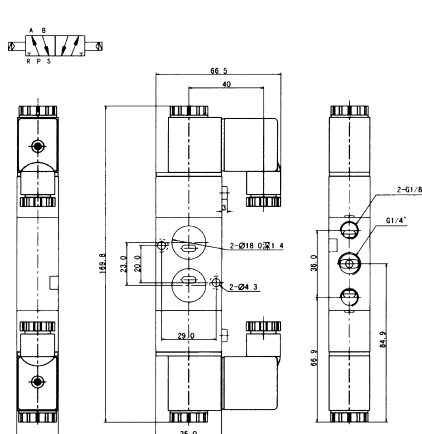

4V230-06

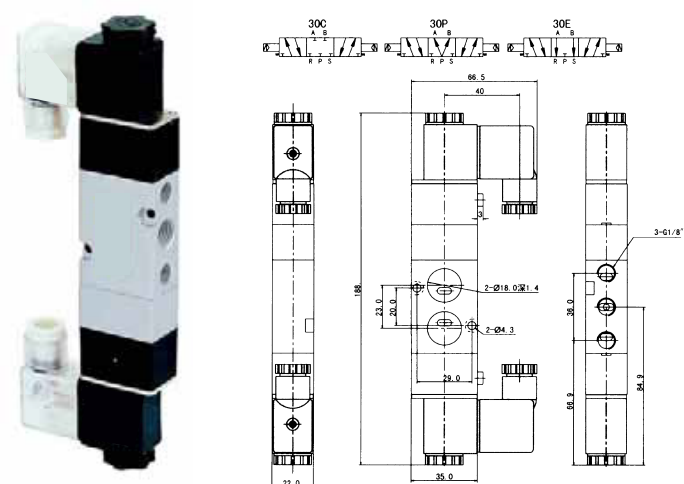


4V230-08

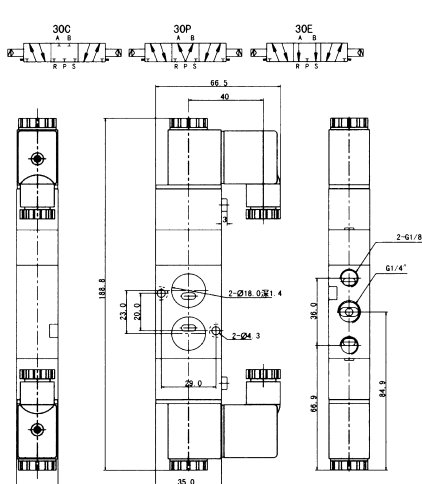


200 Series Control Valve

Dimension(mm):


■ 4M210-06

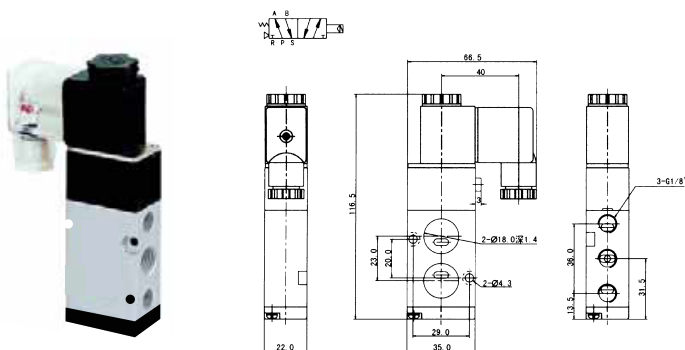


■ 4M210-08

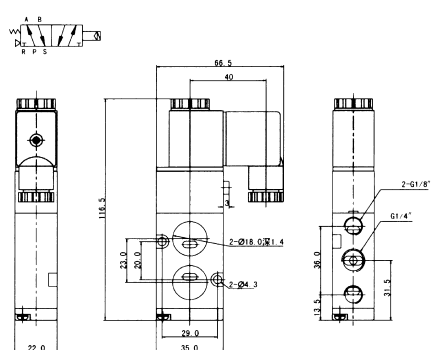


■ 4M220-06

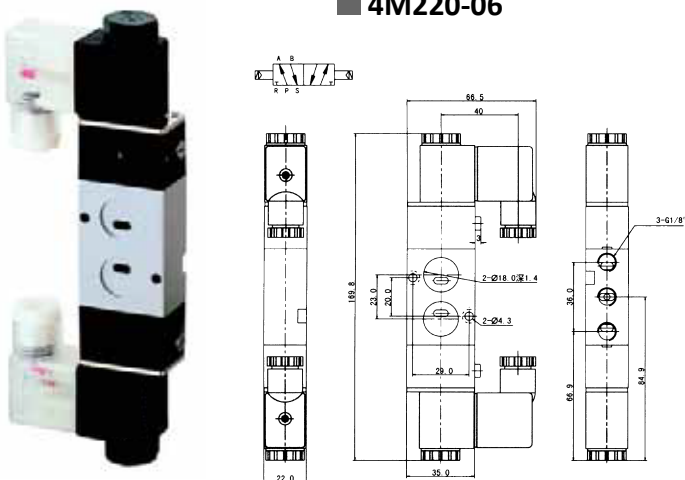


■ 4M220-08

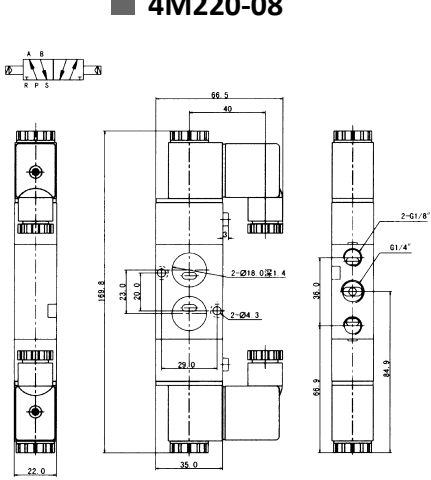

■ 4V230-06

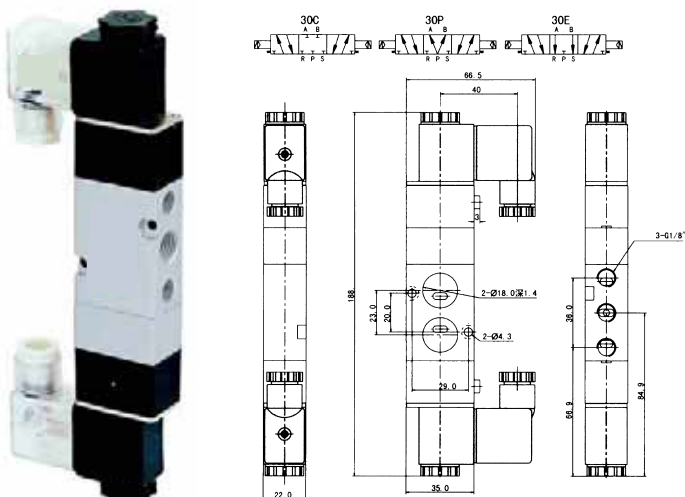

■ 4M230-08

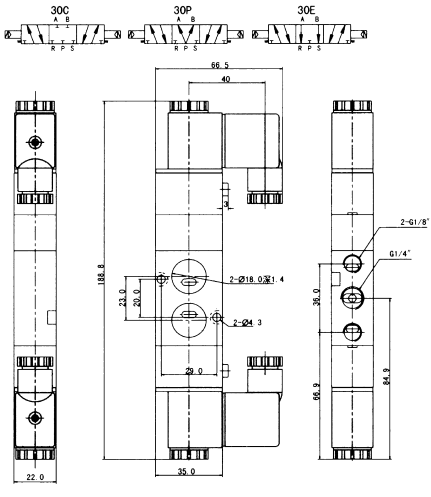


200 Series Control Valve


Dimension(mm):




■ 4A210-06

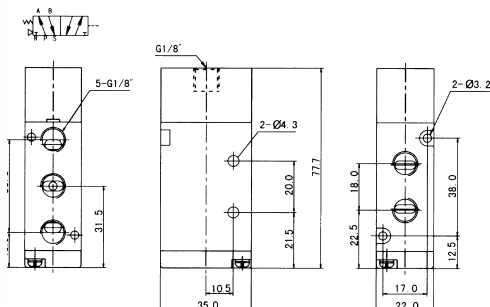


■ 4A210-08

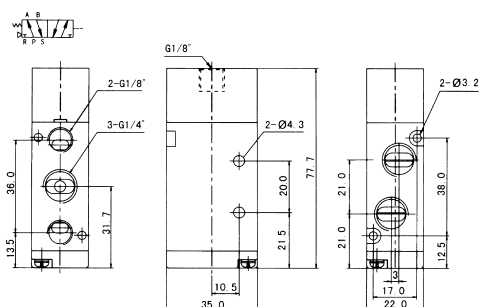


■ 4A220-06

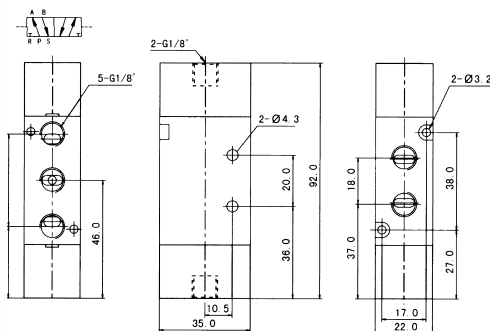


■ 4A220-08

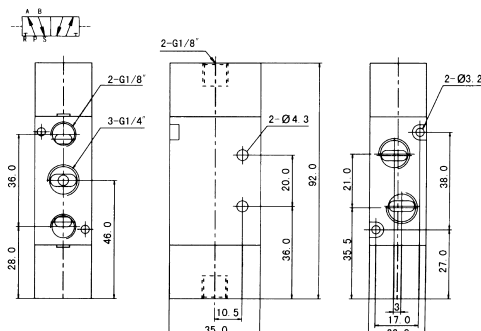

■ 4A320-06

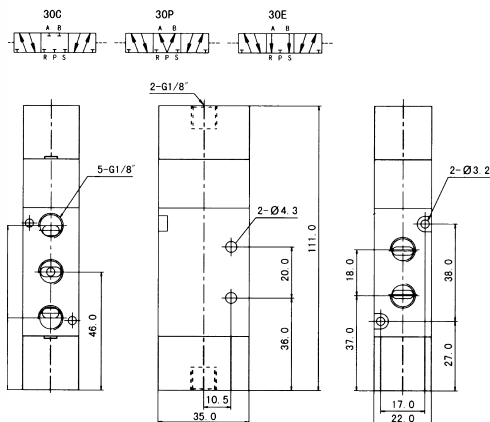


■ 4A230-08

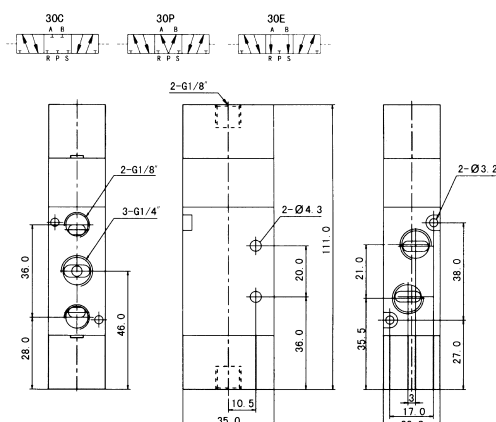

200 Series Control Valve

Dimension(mm):

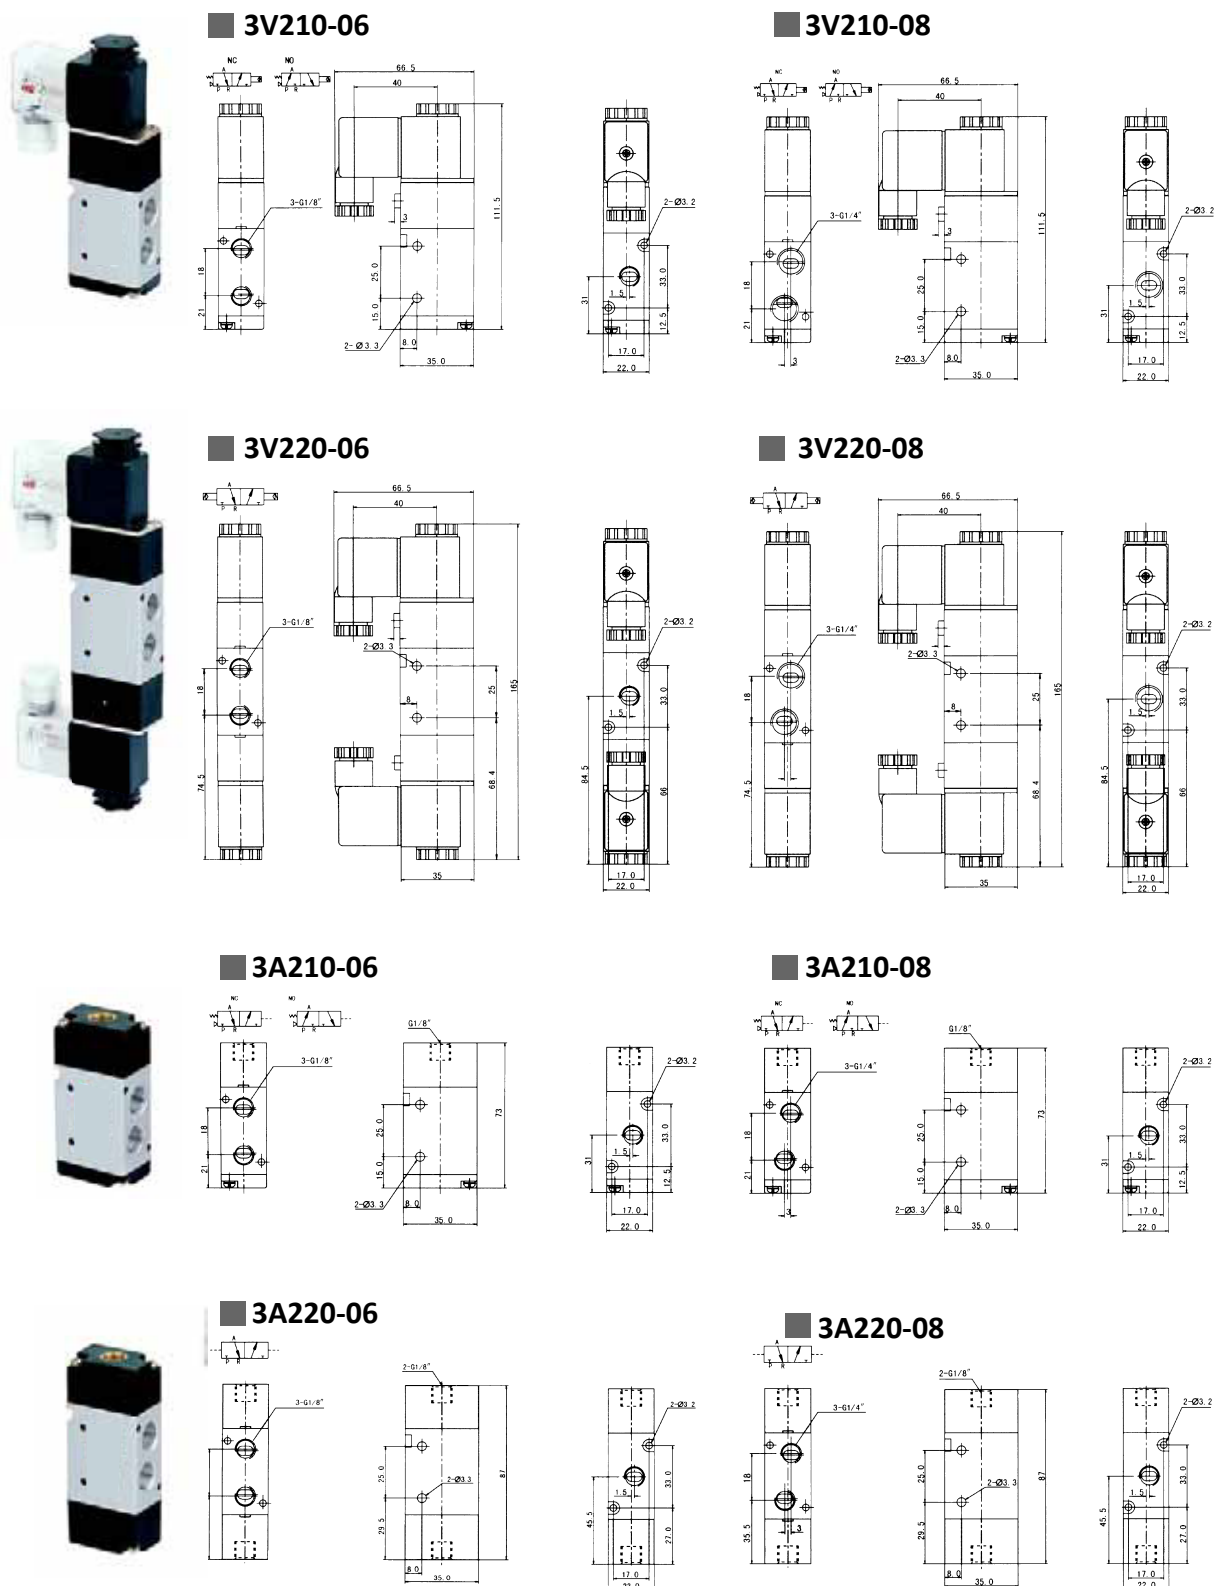

200 Series Control Valve

Solenoid Valve/Air Control Valve

Characteristic:

- Service life: 10 million cycle times.
- The bodies are mirror finished and hardening treated.
- Equipped with imported oil seals with smaller friction and longer service life.
- With imported coils, low power consumption, speedy response.
- Capable of long service time without being damaged.

Specification:

Type	4V210-06	4V220-06	4V230C-06	4V230E-06	4V230P-06	4V210-08	4V220-08	4V230C-08	4V230E-08	4V230P-08
	4V210-06	4A220-06	4A230C-06	4A230E-06	4V230P-06	4A210-08	4A220-08	4A230C-08	4A230E-08	4A230P-08
Position number	2 Position 5 Way		3 Position 5 Way			2 Position 5 Way		3 Position 5 Way		
Effective sectional area	14mm ² (CV=0.78)					16mm ² (CV=0.89)		12mm ² (CV=0.67)		
Type	3V210-06	3V220-06	3A210-06	3A210-06		3V210-08	3V220-08	3A210-08	3A220-08	
Position number	2 Position 3 Way					2 Position 3 Way				
Effective sectional area	14mm ² (CV=0.78)					16mm ² (CV=0.89)				
Port size	input=output=exhausted=G1/8"					input=output=G1/4" output=G1/8"				
Fluid	Compressed Air									
Acting type	Internally pilot - actuated									
Working pressure MPa	0.2 ~ 0.8									
Ambient temperature °C	-5 ~ 50									
Voltage range	± 10%									

How to order:

