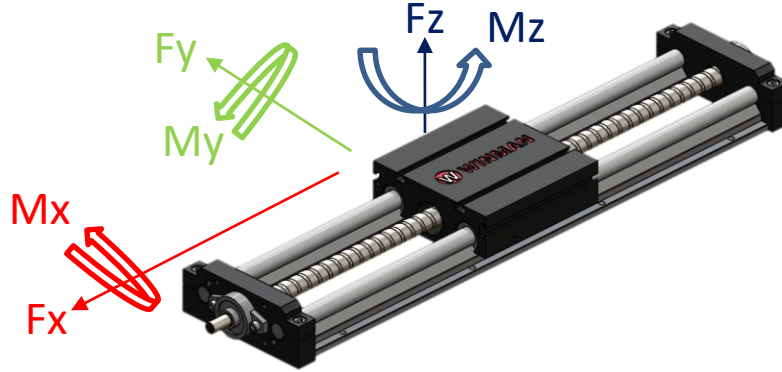


WMSM Serisi Linear Modüller / WMSM Series Linear Modöles

Özellikler / Specification

Tahrik / Drive Unit	Ball Screw
Çap / Size	Ø12, Ø16, Ø20, Ø25, Ø30
Maksimum Strok / Maximum Stroke	Ø12 → 450 mm Ø16 → 1850 mm Ø20 → 2850 mm Ø25 → 2825 mm Ø30 → 3300 mm
Pozisyon Konumlama Hassasiyeti / Position Accuracy	0,2 mm
Gövde / Body	Profil (Alüminyum 6063)
Maksimum Hız / Maximum Speed	0,1 mt/sn

Yükleme Kapasitesi / Load Capacity


WMSM	F_x (N)	F_y (N)	F_z (N)	M_x (Nm)	M_y (Nm)	M_z (Nm)
Ø12	360	850	1215	100	80	110
Ø16	505	1205	1400	167	126	146
Ø20	618	1744	2180	228	195	204
Ø25	713	2323	2904	360	234	224
Ø30	912	2950	3450	410	290	280

Sipariş Kodu / Ordering Code

MODEL / MODEL	ÇAP / DIA	STROK / STROKE	HATVE / PITCH
WMSM	XX	XXXX	05, 10, 20, 25